

U.S. APPLICATION NOT IF KNOWN, SEE 37 CFR

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

09/508869

PCT/US98/19483

RCA88761

21. The following fees are submitted:

CALCULATIONS PTO USE ONLY

**BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5) ) :**

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$970.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... \$840.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$690.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$670.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$96.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$840.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

\$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	12 - 20 =	0	x \$18.00
Independent claims	4 - 3 =	1	x \$78.00

\$0.00

\$78.00

Multiple Dependent Claims (check if applicable). ☐

\$0.00

**TOTAL OF ABOVE CALCULATIONS =**

\$918.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐

\$0.00

**SUBTOTAL =**

\$918.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

\$0.00

**TOTAL NATIONAL FEE =**

\$918.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐

\$0.00

**TOTAL FEES ENCLOSED =**

\$918.00

Amount to be:

refunded

\$

charged

\$

- ☐ A check in the amount of \_\_\_\_\_ to cover the above fees is enclosed.
- ☒ Please charge my Deposit Account No. **07-0832** in the amount of \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **07-0832** A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

JOSEPH S. TRIPOLI - PATENT OPERATIONS  
THOMSON MULTIMEDIA LICENSING, INC.  
PO BOX 5312 - 2 INDEPENDENCE WAY  
PRINCETON, NJ 08543-5312

RECEIVED

SIGNATURE

David T. Shoneman

NAME

39,371

REGISTRATION NUMBER

DATE



Today, most audio/video (AV) devices are controlled with a remote control (RC) unit. The actual physical or direct link may be implemented with infrared (IR), ultrasound (US) or radio-frequency transmission (RF). The protocol between the peripheral device and the RC unit is device specific such that each device comes with its own RC



unit. Each such peripheral device interprets the key presses it receives via its direct link and carries out the corresponding actions. These actions can include, but do not require, the activation of an on-screen display (OSD) mechanism on a controlling or display device (e.g., TV). More importantly, even when such an OSD mechanism is activated, it serves only as a visual feedback to the user. The actual control is driven by input on the RC unit and takes place even when the display device is off (i.e. OSD not visible to the user).

An OSD of such A/V devices is generated in the peripheral device and is output on the NTSC output of the device in the same manner as any other video signal. Thus, no additional hardware or software is needed in either the peripheral or the display device. Figure 1 illustrates a present A/V system 10 having a VCR 12 and a display device 14 (e.g., television) that employs such a control methodology. Menus associated with controlling VCR 12 are generated by the VCR 12 and are provided to the display device 14 via the NTSC output of the VCR 12 as a composite video. Unfortunately, to use the same approach (See Figure 2) with a digital TV (DTV) as a display device 14' is not practical since it would require the menus to be transported as MPEG-2 transport streams. Generation of such streams necessitates integrating an MPEG encoder 15' into all peripheral devices which greatly increases the cost and complexity of such consumer electronic devices.

### Summary of the Invention

This patent application defines a minimal level of interoperability for exchanging audio/video (A/V) content and associated control between common consumer electronic (CE) devices. An interface based on the IEEE 1394 serial bus for the physical and link layers makes use of a control language such as CAL or AV/C for managing OSDs and connectivity issues. With most of today's products, a video source is chosen on the display device and the user then interacts directly with



the device to be controlled (i.e., peripheral device (e.g., VCR)) using the remote control. The menus are generated by the peripheral device and are transported to the TV over the composite video link.

The invention defines transferring On Screen Displays (OSDs) (e.g., menus) from a peripheral device (such as a digital VCR or DVHS) to a controlling device (such as a digital television or DTV) using one of several formats such as (1) sending one frame of video either over the asynchronous using a push method or pull method triggered by a message from the peripheral device to the DTV or over an isochronous channel; (2) transfer a run-length-encoded version of the OSD; (3) transfer the actual information in an OSD bitmap format; (4) MPEG-I frame stills transported over the Isochronous link. In most cases, the peripheral device would not use MPEG-I frames for menus since it is difficult to represent text using this method and it is expensive to encode pictures in real time. However, peripheral devices that want to supply an MPEG picture as a background for the menu would be able to do it.

For example, the Push method involves writing the menu of the peripheral device (i.e., the device to be controlled) directly into a bit buffer of the DTV which is available via the IEEE 1394 serial bus. The peripheral device can update the sections of the display that have changed, and let the DTV know when it is finished so that it can dump the updated menu in the Video RAM for display. Alternatively, a PULL method may be employed.

OSD Management Messages and connection management messages will be defined as general structures that can be carried via AV/C or CAL. It should be noted however that these messages will be able to easily be carried by other means. A focus of the present invention is to enable the capability of carrying A/V information over a digital link and providing a means for an A/V device to display its menu or Graphical User Interface (GUI). Further, the present invention relies



on a user-machine control paradigm as opposed to the machine-machine paradigm which has previously been commonly discussed with respect to IEEE 1394 and CEBus control.

Still further, the present invention supports using IEC61883 for carrying A/V data across the isochronous channels and 61883 FCP may be used to encapsulate the CAL or AV/C command directly over IEEE 1394 serial bus and therefore allows for coexistence with other control languages. Many of the devices will use a registry table that is built during a discovery process which looks at information stored in each instrument's Self Describing Device Table (SDDT). The SDDT may contain such information as a unique ID, node address, etc. The registry tables would be used by the DTV to build a menu to allow the user to set up connections between components (similar to the user selecting the composite input for the source of their TV today).

There are several advantages to this control paradigm where the peripheral device displays its menu or GUI on the DTV and accepts commands directly. For example, little of a control language is required to be defined for basic interoperability and device models are not needed. Further, since inputs go directly to the peripheral device and the OSD is defined as a form of basic video, the control is totally independent of the type of device being controlled thereby assuring long term interoperability.

A control language is required to manage the network, OSD, and for optionally transporting universal commands across the bus. AV/C, CAL or any equivalent control language may be successfully employed in connection with practicing this invention.

#### Brief Description Of The Drawing

The invention may be better understood by referring to the enclosed drawing in which:



Figure 1 shows, in simplified block-diagram form, the interoperability of a prior art audio/video system;

Figure 2 shows, in simplified block-diagram form, the extension of the prior art interoperability between a digital VCR and a digital television;

Figure 3 is a simplified schematic block diagram illustrating the IEEE 1394 serial bus protocol;

Figure 4 shows, in simplified block-diagram form, the interoperability of digital devices employing the present invention; and

Figure 5 shows, in a simplified schematic form, the interaction of the digital devices of Figure 4.

In the drawing, reference numerals that are identical in different figures indicate features that are the same or similar.

#### Detailed Description of the Drawings

The use of IEEE 1394 serial bus has been suggested for many applications within a Home Network environment. It is being discussed within Video Electronics Standards Association (VESA) for use as a "whole home network." It is being built into the next generation PCs and will be used for many local peripherals including disc drives. It is also clear that this will be an important interface for digital A/V consumer electronic devices such as digital televisions and VCRs. Within the entertainment cluster composed of consumer electronic audio/video devices, there are many different levels of interface support at the application level.

IEEE-1394 is a high speed, low cost digital serial bus developed for



use as a peripheral or back-plane bus. Some of the highlights of the bus include: Dynamic node address assignments, Data rates of 100, 200, and 400 Mbits/sec, Asynchronous and isochronous modes, fair bus arbitration, and consistency with ISO/IEC 13213. Figure 3 illustrates the serial bus protocol for the IEEE 1394 serial bus as a set of three stacked layers.

The physical layer 18 has physical signaling circuits and logic that are responsible for power-up initialization, arbitration, bus-reset sensing, and data signaling. Two shielded low-voltage differential signal pairs, plus a power pair are defined for the IEEE-1394 cable. Signaling is done by using Data-Strobe bit-level encoding which doubles jitter tolerance.

Data is formatted into packets in the link layer 20. Two classes of data communication between devices are supported: asynchronous and isochronous. Asynchronous communication can be characterized as "allows acknowledgment," while isochronous communication can be characterized as "always on time." The asynchronous service will be used primarily for control and status messages while isochronous communication will be used for data streams such as MPEG video. The timely nature of isochronous communication is achieved by providing a cycle every 125 $\mu$ sec. Isochronous cycles take priority over asynchronous communication.

Asynchronous transfer can take place any time the bus is free. A minimum of 25  $\mu$ sec out of every 125  $\mu$ sec cycle is reserved for asynchronous data transfer. Isochronous transfer provides a real-time data transfer mechanism. An ongoing isochronous communication between one or more devices is referred to as a channel. The channel has to be established first, then the requesting device is guaranteed to have the requested amount of bus time every cycle.

The transaction layer 22 defines a complete request-reply protocol to



perform bus transactions. Although transaction layer 22 does not add any services for isochronous data transfer, it does provide a path for management of the resources needed for isochronous services. This is done through reads and writes to the control status register (CSR). Transaction layer 22 also defines a retry mechanism to handle situations where resources are busy and unable to respond. Asynchronous data is transferred between IEEE-1394 nodes utilizing one of three transactions; "read-data" for retrieving data from a different node, "write-data" for transferring data to a different node and "lock-data" for transferring data to a different node for processing and then the data is returned back to the original node.

Serial bus management 24 describes the protocols, services, and operating procedures whereby one node is selected and may then exercise management level control over the operation of the remaining nodes on the bus. There are two management entities defined for IEEE 1394 serial bus; the isochronous resource manager 26 and the bus manager 28. These two entities may reside on two different nodes or on the same node. Bus manager 28 may be absent from the bus. In this circumstance, the isochronous resource manager 26 exercises a subset of the management responsibilities normally assumed by the bus manager 28. The bus manager 28 provides a number of services including; maintenance of the speed and topological map, and bus optimization. The isochronous resource manager provides facilities for allocation of isochronous bandwidth, allocation of channel numbers, and the selection of the cycle master.

Node control is required at all nodes; node controller 30 implements the CSRs required by all serial bus nodes and communicates with the physical 18, link 20, and transaction 22 layers and any application present in the device. Node controller 30 component as well as CSR and configuration ROM facilities are used to configure and manage the activities at an individual node.



For the IEEE 1394 serial bus to function properly, an Isochronous Resource Manager (IRM) 26 and a Bus Manager (BM) 28 will be needed. Since most clusters will include a display device of some kind, it should be required that a Set Top Box with Analog Display and DTV must be IRM and BM capable. In some cases, such as an all audio cluster, a display device may not be present. In this case, it should also be required that a Digital Audio Amp be IRM and BM capable.

The IRM 26 provides the resources necessary for the serial bus to cooperatively allocate and de-allocate the isochronous resources, (channels and bandwidth), required for orderly isochronous operations. The IRM 26 provides a common location for the other nodes to check on availability of channels and bandwidth, and to register their new allocations. The IRM 26, whose location is known immediately upon completion of the self identify process, also provides a common location where serial bus nodes may determine the identity of the BM 28, if one is present.

The BM 28, if present, provides management services to other nodes on the serial bus. These include activation of a cycle master, performance optimization, power management, speed management and topology management.

Functional Control Protocol (FCP) is designed in order to control devices connected through an IEEE-1394 bus. FCP uses the IEEE-1394 asynchronous write packet for sending commands and responses. The IEEE-1394 asynchronous packet structure with FCP imbedded in the data field shown below. The Command/Transaction SET (CTS) specifies the command set (e.g. AV/C, CAL).



FCP Frame (shaded) in the payload of an asynchronous write

Destination ID	TI	Rt	0001	Pri
Source ID				
Destination offset				
Data Length		Extended tcode		
Header CRC				
FCP Frame (shaded) in the payload of an asynchronous write				
Data CRC				

FCP frames are classified as command frames, and response frames. The command frame is written into a command register on a peripheral device and the response frame is written into a response register on a controller. The standard specifies two addresses for the command and the response.

The structure of the isochronous packet in IEC-61883 is shown below. The packet header is composed of two quadlets of an IEEE-1394 isochronous packet. (A quadlet is defined as four 8-bit bytes.) The Common Isochronous Packet (CIP) header is placed at the beginning of the data field of an IEEE-1394 isochronous packet, immediately followed by the real time data.

Data Length	Tag	Channel	Tcode	Sy
Header CRC				
CIP Header				
Real Time Data				
Data CRC				

Data length is the data field length in bytes, Tag indicates whether CIP exist (01) or not (00), Channel specifies the isochronous channel number, Tcode=1010, and Sy is an application specific control field.

The 61883 standard defined a generic format for consumer A/V transmission. This format has a two quadlet header as shown below. In the table, SID is Source node\_ID, DBS is data block size in quadlets,



Fraction Number (FN) allow you to divide source packets for bus time utilization, Quadlet Padding Count (QPC) indicates number of quadlets count, Source Packet Header (SPH) is a flag to indicate whether the packet has a source packet header, rsv indicates reserved for future, Data Block Counter (DBC) is a continuity counter, FMT indicates the format ID such as MPEG2, DVCR, and Format Dependent field (FDF) is format ID specific.

0	0	SID	DBS	FN	QPC	SPH	rsv	DBC
1	0	FMT	FDF					
Reserved			time stamp					

The concept of plugs and plug control registers is used to start and stop isochronous data flows on the bus and to control their attributes. Plug control registers are special purpose CSR registers. The set of procedures that use the plug control registers to control an isochronous data flow are called Connection Management Procedures (CMP).

Isochronous data flows from one transmitting device to zero or more receiving devices by sending the data on one isochronous channel on the IEEE-1394 bus. Each isochronous data flow is transmitted to an isochronous channel through one output plug on the transmitting device and is received from the isochronous channel through one input plug on each of the receiving devices.

The transmission of an isochronous data flow through an output plug is controlled by one output Plug Control Register (oPCR) and one output Master Plug Register (oMPR) located on the transmitting device. oMPR controls all common isochronous data flow attributes while oPCR controls all other attributes. Similar registers (iPCR, and iMPR) exist for the reception of isochronous data. There is only one oMPR (iMPR) for all output plugs (input plugs). The contents of oMPR (iMPR) include data rate capability and number of plugs among



others. oMPR and iMPR each contain a connection counter, channel number, and data rate among others.

There are a number of management procedures for each connection type that allows an application to establish a connection, overlaying a connection, and breaking a connection. These procedures involve allocation of IEEE-1394 resources, setting appropriate values into the plug control registers, reporting possible failure conditions to the application, and managing connections after a bus reset. One such CMP follows.

To transport isochronous data between two A/V devices on IEEE 1394 serial bus, it is necessary for an application to connect an output plug on the transmitting device to an input plug on the receiving device using one isochronous channel. The relationship between one input plug, one output plug and one isochronous channel is called a point-to-point connection. Similarly there are broadcast-out connections (one output plug and one isochronous channel) and broadcast-in connections (one input plug and one isochronous channel)

The flow of isochronous data is controlled by one output plug control register (oPCR) and one output master plug register (oMPR) located on the transmitting side. oMPR controls all the attributes (e.g. data rate capability, broadcast channel base etc.) that are common to all isochronous flows transmitted by the corresponding A/V device.

The reception of an isochronous data flow through an input plug is controlled by one input plug control register (iPCR) and one input master plug register (iMPR) located in the receiving device. iMPR controls all the attributes (e.g. data rate capability etc.) that are common to all isochronous data flows received by the corresponding device.



An isochronous data flow can be controlled by any device connected to the IEEE 1394 serial bus by modifying the corresponding plug control registers. Although Plug control registers can be modified by asynchronous transactions on IEEE 1394 serial bus, the preferred method of connection management is through the use of AV/C. It is fully within the scope of this invention that CAL may be utilized for connection management.

In order for a consumer electronic device to interact with other devices interconnected via a IEEE 1394 serial bus, a common product mode and common set of commands must be defined. Three standards exist for device modeling and control: CAL, AV/C and the approach adopted for the USB.

CAL and AV/C are control languages that distinguish between logical and physical entities. For example, a television (i.e., a physical entity) may have a number of functional components (i.e., logical entities) such as a tuner, audio amplifier, etc. Such control languages provide two main functions: Resource allocation and Control. Resource allocation is concerned with requesting, using and releasing Generic Network resources. Messages and control are transported by the FCP as defined in IEC-61883 and discussed above. For example, CAL has adopted an object base methodology for its command syntax. An object contains and has sole access to a set number of internal values known as instance variables (IV). Each object keeps an internal list of methods. A method is an action that an object takes as a result of receiving a message. When a method is invoked, one or more IVs are usually updated. A message consists of a method identifier followed



by zero or more parameters. When an object receives a method, it looks through its list of methods for one which matches the method identified in the message. If found, the method will be executed. The parameters supplied with the message determine the exact execution of the method.

The design of control languages is based on the assumption that all consumer electronic products have a hierarchical structure of common parts or functions. For example, CAL treats each product as a collection of one or more of these common parts called Contexts. These contexts are designed to allow access to product functionality in a uniform way. The context data structure is a software model defined in each device that models the operation of all device functions.

A context consists of one or more objects grouped together to form a specific functional sub-unit of a device. Like an object, context is a model of a functional sub-unit. Devices are defined by one or more contexts. CAL has defined a large set of contexts to model various types of consumer electronic devices. Each context, regardless of what product it is in, operates the same way.

Objects are defined by a set of IVs, for example the IVs for a binary switch object contain required and optional IVs. Required IVs include a variable (`current_position`) that indicates whether the switch is on or off and the default position (`default_position`) of the switch. Optional IVs include `function_of_positions`; `reporting_conditions`; `dest_address`; `previous_value` and `report_header`. IVs are just like variables in any software program and are supported in CAL as Boolean, Numeric, Character, and Data (array). The IVs in an object can be categorized into three general groups: support IVs, reporting IVs, and active IVs. The support IVs are usually read only variables that define the installation use of the object and operation of the active IVs. Active IVs of an object are the variables that are primarily set or read to operate the object.



The interaction between a controller (e.g., digital television) and target or peripheral device (e.g., digital VCR) can mainly be divided into two major categories:

- i) A **machine-machine interaction** where both controller and peripheral device are machines. It is important to note that for this type of interaction, there is no user initiation at the time of the actual interaction. However, it is possible that the user preprogrammed the controller to carry a specific action at a specific point in time.
- ii) A **user-machine interaction** where a human is initiating actions on the controller.

The primary means of user-machine input for analog audio/video (A/V) devices is the use of a remote control unit or the front panel. Some of the interaction may also makes use of an on-screen display (OSD) mechanism. In this kind of interaction the user interacts directly with the peripheral device.

The present application defines a base level of interoperability between devices from different manufacturers at a minimal cost. The users have the capability to interact with the A/V devices interconnected via an IEEE 1394 serial bus in a manner to which they are accustomed (i.e. use of an RC unit possibly in connection with an OSD). Figure 4 defines such a system 10" for providing interoperability between digital A/V devices interconnected via an IEEE 1394 serial bus.

In such a system 10", interoperability is achieved by transferring the menu or GUI information directly from the peripheral device 12" (e.g., DVCR) to controlling device 14" (e.g., DTV) utilizing one of the below-defined methodologies. The menu is not transferred as a composite video stream which would require first passing the menu information through a MPEG encoder contained in the peripheral device. The



menu is transferred via serial bus 16" to DTV 14" where the menu information is overlaid in DTV 14" with the decoded MPEG stream prior to being displayed.

5

To simplify the transfer of OSD information, a "Pull" method to transfer the OSD information from the peripheral device or DVCR 12" to the display capable controlling device or DTV 14" may be used. With this method, the bulk of the OSD data is transferred from the peripheral device to a display device by asynchronous read requests issued by the display device. That is, the display device reads the OSD information from the memory of the peripheral device by making use of at least one block read transaction of IEEE 1394. The display device is informed of the location and size of the OSD data via a "trigger" command which is sent from the peripheral device to the display device when the peripheral device is ready to begin transferring data.

10

15

Since the OSD information on the peripheral device is updated in response to user entered data (such as from a remote controller 13), the display device is alerted of the availability of newly updated data. This can be achieved by sending a short message (i.e., "trigger") to the OSD object of the controlling device. It should be noted that such a message needs to inform the display device of the starting location as well as length of the OSD data to be read. The length is necessary since the application in the controlling device is going to make use of asynchronous read transactions of IEEE 1394.

If the length is greater than what would fit into the maximum packet length possible for the particular IEEE 1394 network, the controller may initiate multiple block read transactions until all the OSD information has been read. In addition to the starting location and length of the current OSD data to be transferred to a display device, a field indicating the type of OSD data is useful. This is especially useful since in this case the same mechanism can also be used to trigger the

20



The peripheral devices may indicate to the controller (i.e., display device) that it has OSD data ready to be transferred. An OSD Trigger message containing the starting offset address, length of the OSD data and the OSD\_type information is sent to the controller. The format of one such a message is defined below. This information will be used to determine the number of read requests it need to generate. The display device would pull the menu by reading it from the peripheral devisee's bus mapped memory space. This message could be encapsulated in CAL or AV/C.



OSD_data_offset	OSD_data_type	OSD_data_length
<----- 6 Bytes ----->	<----- 1 Byte ----->	<----- 3 Bytes ----->

OSD\_data offset :        48 bit offset address used in IEEE 1394 where  
the OSD data can be found on the target node.

OSD\_data\_type :        8 bit field indicating the type of OSD data  
presented.

A typical ordered flow may include the following messages, as illustrated in Figure 5. The peripheral device (e.g., digital VCR 12") receives a command pertaining to a first key press from the corresponding remote controller 13". In response to the command, the peripheral device provides a message to the controller (e.g., digital television 14") which includes the starting location and the length of the OSD information corresponding to the appropriate menu. Next, the controller sends a message to the peripheral device indicating a block read request. The peripheral device responds with a block read response and OSD data. This is repeated until the entire menu is transferred to the controller.

Defined below are alternative methods for transferring an OSD menu from a peripheral device to a controlling display device.

An asynchronous push method which primarily uses IEEE 1394 asynchronous write transactions initiated by the peripheral device may be used to write the OSD data onto the controller. This approach allows a peripheral device to write its menu contents into a controller device. Since it is expected that the menus will be larger than the MTU (Maximum Transfer Unit) of the bus, a fragmentation header can be added. The menu transport layer should add this header. On the receiving side, this layer reassembles the menu and passes it to



higher layers. A possible fragmentation header is defined below. The fragmentation header is one quadlet and contains a sequence number and the source of the fragment.

Fragment sequence no (2) bytes	Fragment source (node_id) (2) bytes
--------------------------------------	---

Other methods can be used to fragment and reassemble the OSD data while transferring using an asynchronous push methodology.

An isochronous transport method provides for broadcasting the OSD data over one of the Isochronous channels provided by IEEE 1394. Bandwidth would need to be reserved and held as long as the peripheral is being controlled using the OSD. It would also be possible that there would not be enough bandwidth left for the reservation of the channel. This could create a situation where the user is not able to get the feedback they require.

An Asynchronous Stream method would be similar to the Isochronous Stream method except that it would use an Asynchronous Stream to carry the OSD information. An Asynchronous Stream is essentially the same as an Isochronous Stream except that there is no bandwidth reservation and the stream is sent in the Asynchronous portion of the bus cycle.

During operation through a direct link, a peripheral device simply receives inputs from its RC unit or front panel and carries out corresponding actions. However, there is a slight complication when, as a result of these actions, an OSD is supposed to be generated on a display device. Since in this case, the actions of the peripheral device were initiated through its own direct link, the peripheral device has no knowledge as to which node on the network to display its OSD. (The peripheral device constructs the OSD data (i.e., OSD blocks



defined by a header) and stores it in its memory area.) Therefore a device which detects initiation of control through its direct link, can send OSD\_info messages to each OSD capable device (i.e., devices which have implemented the OSD object). It is up to the application in the display device to decide whether to act on this message or not. For example, if focus on that display device has been given to VCR1 and it receives an OSD\_info message from VCR1, it is quite natural for the display device to act on it. If the display device is not focused on the particular device, the user can be alerted of the presence of an OSD display request by a remote unit but can choose to ignore it depending on the OSD\_data\_type in the received OSD\_info message. Since the actual control is through the direct link, it has absolutely no effect on the peripheral device whether any or multiple display devices choose to display the OSD. On the other hand, this mechanism may also be used to inform the user of error conditions, warnings etc. which the user may or may not want to have displayed at the time. Therefore, the OSD\_info message includes a field for OSD\_data\_type to indicate whether the OSD data presented to the display device is a warning message, error message, normal OSD data etc.

OSD data can also be in a descriptive form such as HTML. However, for the purposes of this invention, HTML would be used only for describing how the OSD would look. HTML would not be used for control as it is for the Internet.

After a trigger message is received from the peripheral device, the OSD module in the Display Device requests memory accesses starting at the memory location in the trigger message. At this point, the OSD Module reads the OSD Block 1. The data is received using IEEE 1394 read commands and transferred to the display memory area in the display device. This data is then stored in the Display device's internal memory in the format required by the Display device's OSD controller.



The discovery process allows the controlling device to discover other devices in the network. This process is activated by a bus reset and serves to search and discover existing devices on the network. A bus reset may be caused by connecting/disconnecting a device, software initiated reset etc. This software module relies on some information stored on each device configuration ROM. This information is referred to as Self Description Device (SDD) and contains information such as Model #, Location of menu, URL, EUI Vendor ID etc.

The SDDT of a Display/Controller contains a pointer to an information block which contains information about the display capabilities of the device. The information block may include; type of display (*interlaced or progressive*), maximum bytes per line, true color capability, resolution modes supported (*full, 1/2, 1/3*), maximum bits/pixel supported for palette mode (2, 4, 8), etc. Other methods of discovery can also be used to obtain this information, such as the Home Plug and Play as defined for CAL or the subunit descriptors defined for AV/C.

After the bus initialization is complete, the discovery manager reads the SDD information located in the ROM of each connected device. This information will be built into a registry table.

Each device on the IEEE 1394 serial bus will have a registry table which will be used to keep track of other devices on the bus and their capabilities. For all devices on the bus, this device registry (registry table) will be constantly updated in the discovery process on bus resets. The Registry provides services to the application for mapping volatile characteristics like IEEE 1394 node\_ID, IP address etc. to a non-volatile identification scheme used by the application. The application uses the non-volatile 64-bit EUI (Extended Unique Identifier) for identifying any node on IEEE 1394 serial bus. The services of Registry are used to map this 64-bit EUI to volatile IEEE 1394 node\_ID or IP.




The "Registry" module is a system service module. The "Registry" system module allows the communication between the nodes within the home network by abstracting their location inside the home network.

The registry table is maintained by the Registry manager within each device and contains the information for each node to provide the service previously specified. This registry table is constantly updated by the Discovery manager on bus resets. Each row of the Registry Table can be as follows:

64-bit EUI	1394 node_ID	IP address	Manufac/ Model#	Device Type
---------------	-----------------	---------------	--------------------	----------------

The fields of the registry table are defined as:

- **64-bit EUI** is a 64-bit number that uniquely identifies a node among all the Serial Bus nodes manufactured world-wide.



- **1394 node\_ID** is a 16-bit number that uniquely identifies a Serial Bus node within a 1394 subnet. The most significant 10 bits are the bus ID and the least significant bits are the physical ID. Bus ID uniquely identifies a particular bus within a group of bridged buses. Physical ID is dynamically assigned during the self-identification process.
- **IP address** is a 32-bit private IP address assigned dynamically.



- **Manufacturer/Model #** is obtained from the device's SDDT and is used to inform the customer of possibilities for selecting a source.
- **Device Type** is also obtained from the device's SDDT and is used to inform the customer of possibilities for selecting a source. This field may also be useful in determining what stream format should be used. For example, a game machine may not use MPEG 2 as an output format.

The application can use the registry to determine the IEEE 1394 address for any node on the home network based on the 64-bit EUI of that node. The registry will be built during the discovery process after a bus reset. Correlation to a stable identifier such as the EUI is important since node addresses can change during a bus reset.

While the invention has been described in detail with respect to numerous embodiments thereof, it will be apparent that upon a reading and understanding of the foregoing, numerous alterations to the described embodiment will occur to those skilled in the art and it is intended to include such alterations within the scope of the appended claims.



Claims

1. A peripheral consumer electronic device comprising:
- 5 (a) means for communicating with a digital display device interconnected by a digital bus;
- (b) means for providing digital video content;
- 10 (c) means for generating, in said peripheral device, digital OSD data representative of an on-screen display menu associated with said peripheral device, said digital data being capable of being displayed; and
- (d) means for transferring said digital video content and said digital OSD data capable of being displayed via said digital bus to said display device.
- 15 2. The peripheral device of claim 1 wherein said transferring means comprises means for writing via said digital bus said digital data to a memory device associated with said display device;
- 20 3. The peripheral device of claim 2 further comprising a means for navigating said menu in response to a user initiated command, said navigating means generates updated digital data in response to said user initiated command and writes said updated digital data to said memory device, said user initiated command controls operating modes of said peripheral device.
- 25 4. The peripheral device of claim 1 further comprising a mapping means for identifying the connectivity of said peripheral device with other devices on said digital bus.
- 30 5. The peripheral device of claim 4 further comprising means for receiving characteristic information of each device connected on said digital bus.
6. The peripheral device of claim 1 further comprising means for processing video data.



7. A method for controlling a peripheral consumer electronic device interconnected via an IEEE 1394 serial bus to a display device comprises:

- 5 (a) receiving, in said display device, digital video content from said peripheral device utilizing an isochronous transfer mechanism of said serial bus;
- (b) generating, in said peripheral device, digital data representative of an on-screen display menu associated with said peripheral device, said  
10 digital data being capable of being displayed;
- (c) transferring said digital data via said serial bus to said display device utilizing an asynchronous transfer mechanism of said serial bus; and
- (d) combining, in said display device, said digital video content and said digital data.

15 8. The method of claim 7 further comprising the steps of:

- (a) receiving control information in response to a user initiated command, said control information controlling operating modes of said peripheral device;
- 20 (b) navigating said menu in said peripheral device in response to said control information, wherein the step of navigating comprises updating said digital data; and
- (c) transferring said updated digital data to said display device.

25 9. A method for controlling a peripheral consumer electronic device interconnected via a IEEE 1394 serial bus to a display device comprises:

- (a) mapping the connectivity of each device on said serial bus;
- (b) communicating with said display device utilizing an asynchronous transfer mechanism of said serial bus;
- 30 (c) generating, in said peripheral device, digital data representative of an on-screen display menu associated with said peripheral device; and
- (d) providing to said display device a first message indicative of the availability of said digital data, said first message comprising the location and size of said digital data in a memory device associated  
35 with said peripheral device.



10. The method of claim 9 further comprising the steps of:

- 5
- (a) receiving control information in response to a user initiated command, said control information controlling operating modes of said peripheral device;
  - (b) navigating said menu in said peripheral device in response to said control information, wherein the step of navigating comprises updating said digital data;
  - 10 (c) providing to said display device a second message comprising the location and size of said updated digital data; and
  - (d) transferring said updated digital data to said memory device.


11. The method of Claim 7 wherein the step of transferring said digital data via  
15 said serial bus utilizes an isochronous transfer mechanism of said serial bus.

12. A display device comprising:

- 20
- (a) means for communicating with a peripheral device interconnected by a digital bus;
  - (b) means for receiving digital video content;
  - (c) means for receiving, from said peripheral device, digital data representative of an on-screen display menu associated with said peripheral device, said digital data being capable of being displayed; and
  - 25 (d) means for overlaying and displaying said digital data onto said digital video content.




1/5

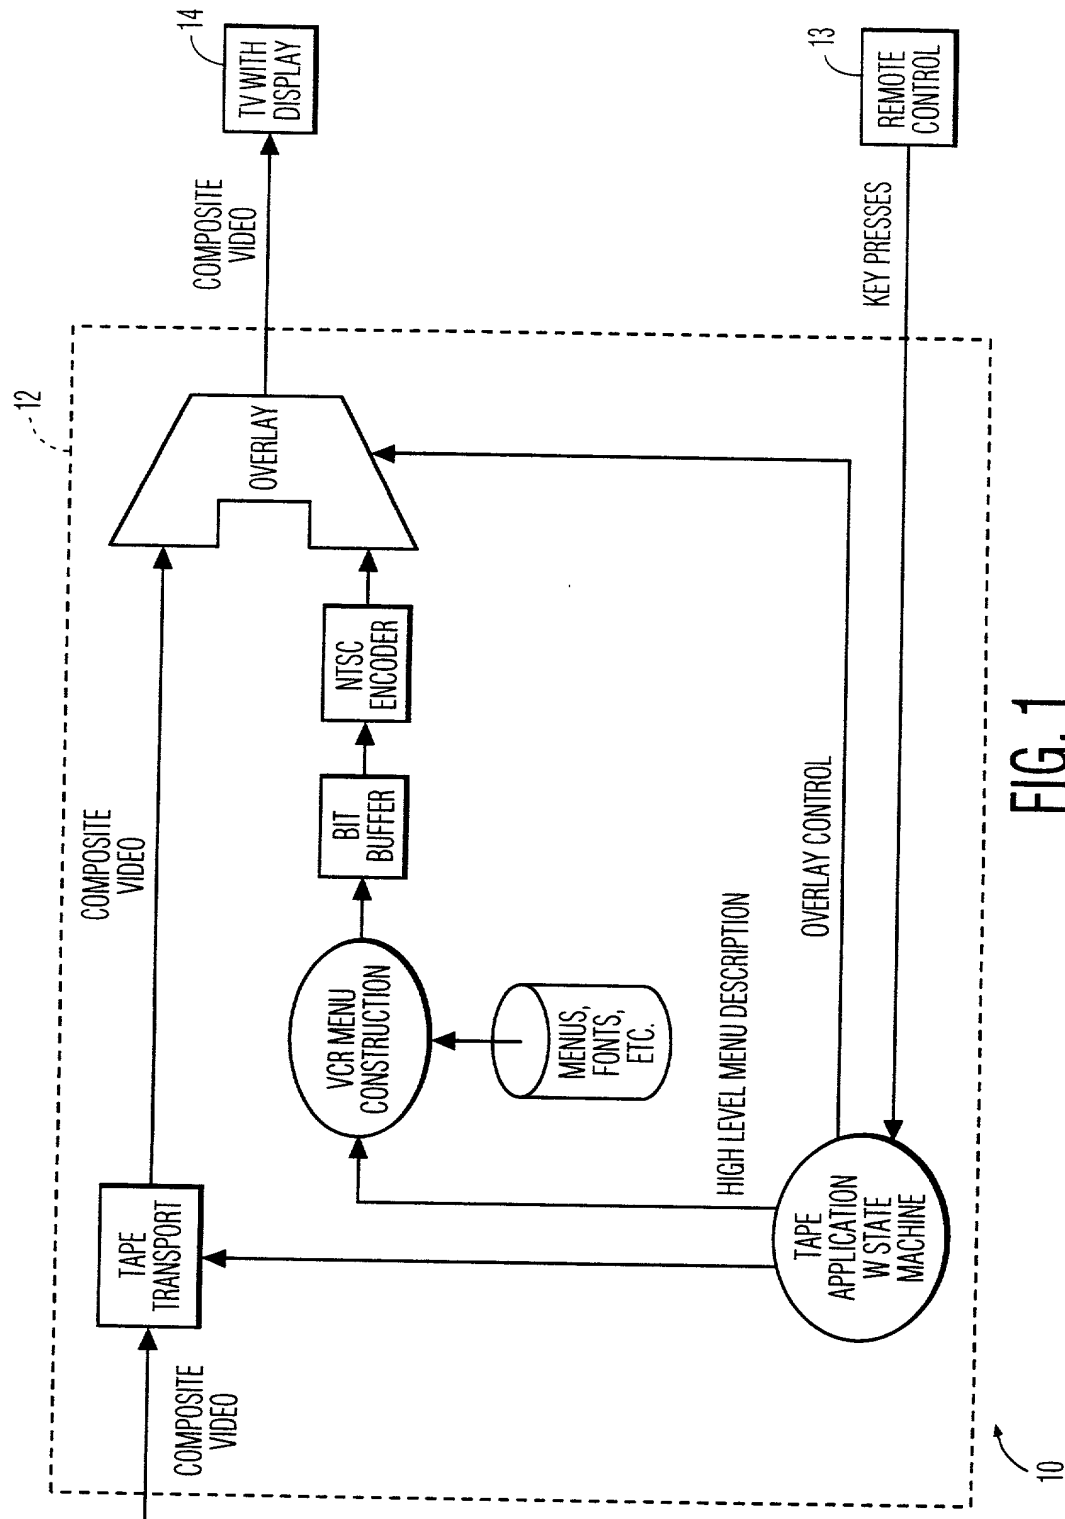



2/5

FIG. 2

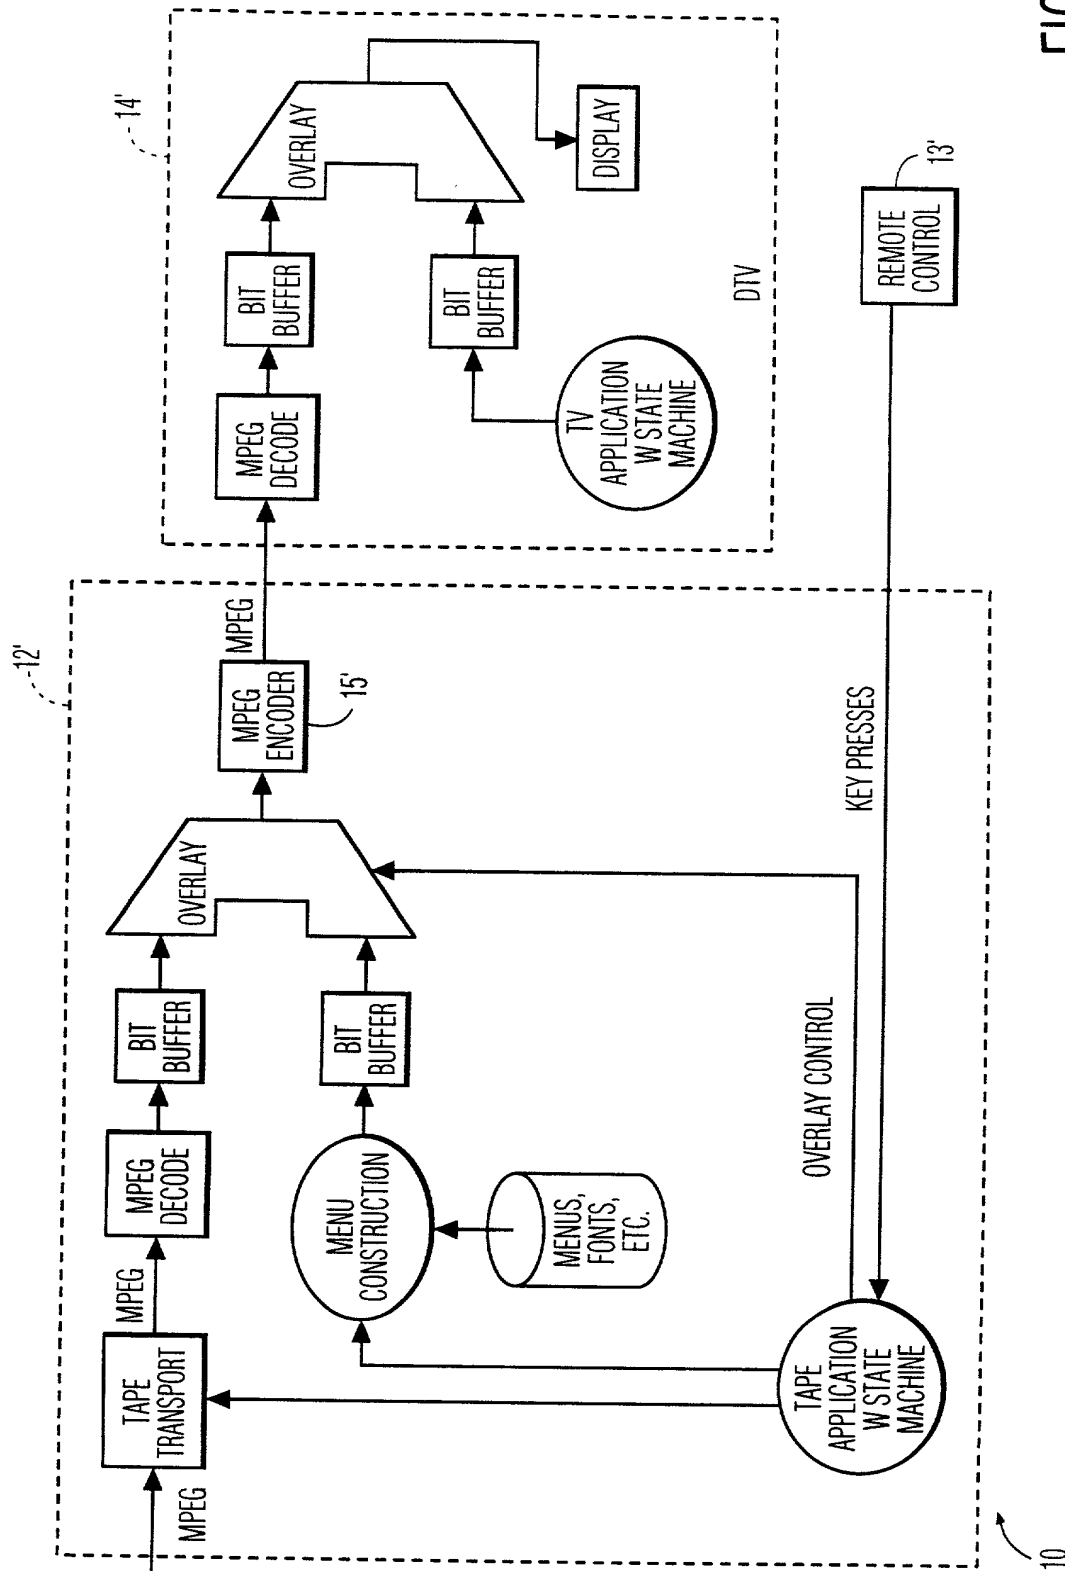



3/5


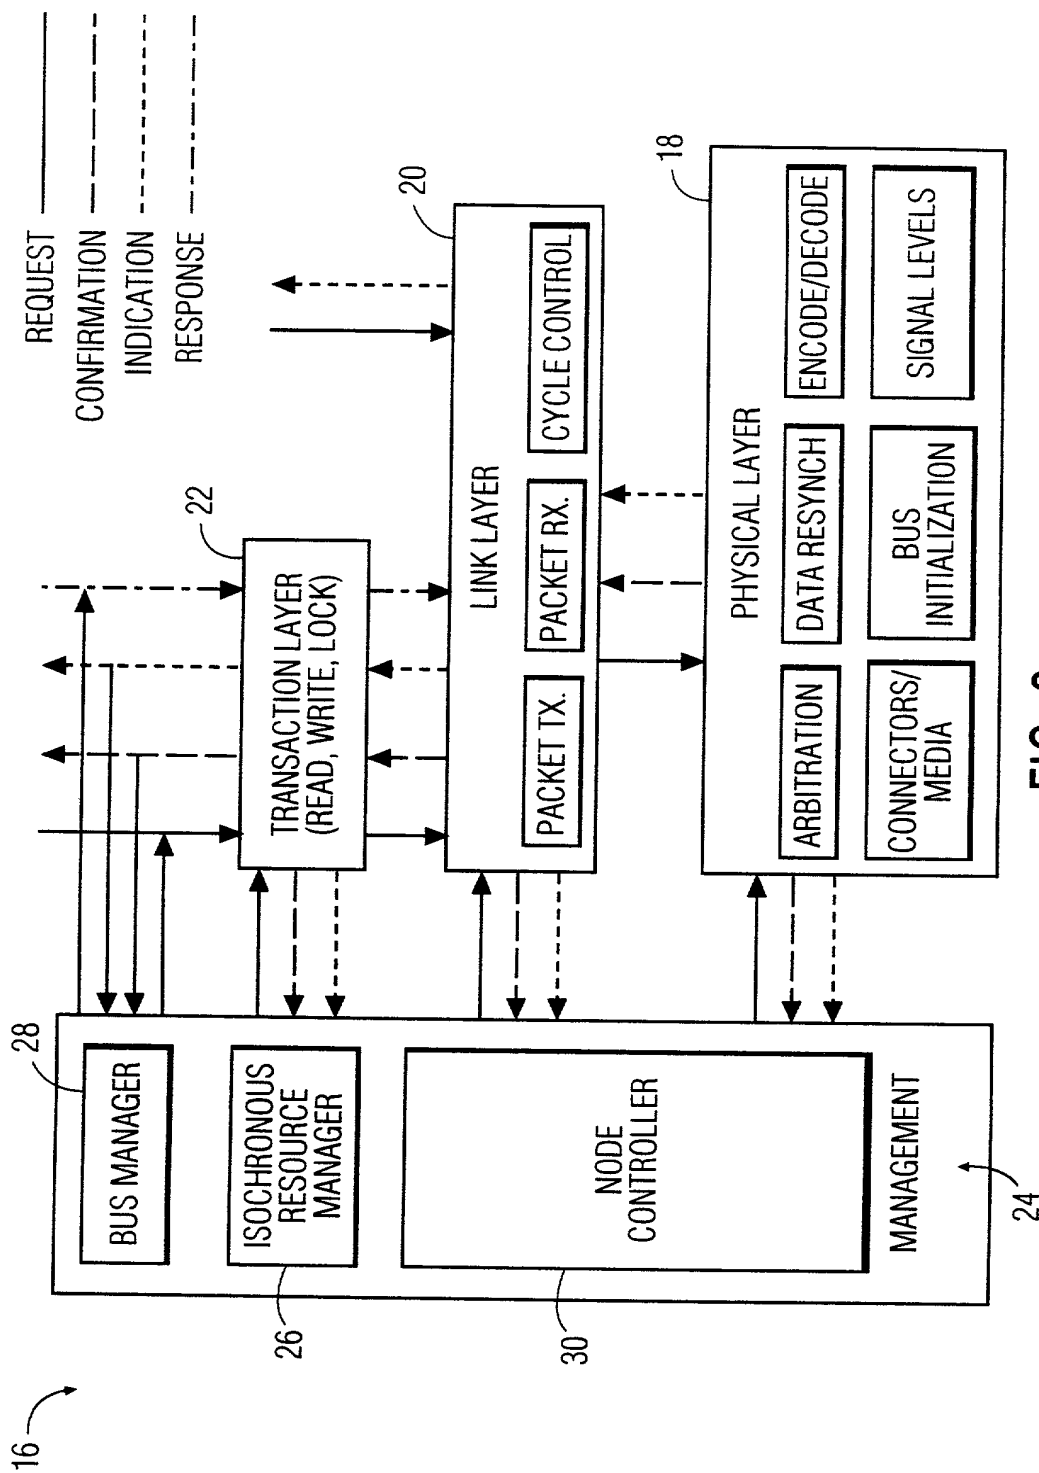


FIG. 3





**FIG. 4**

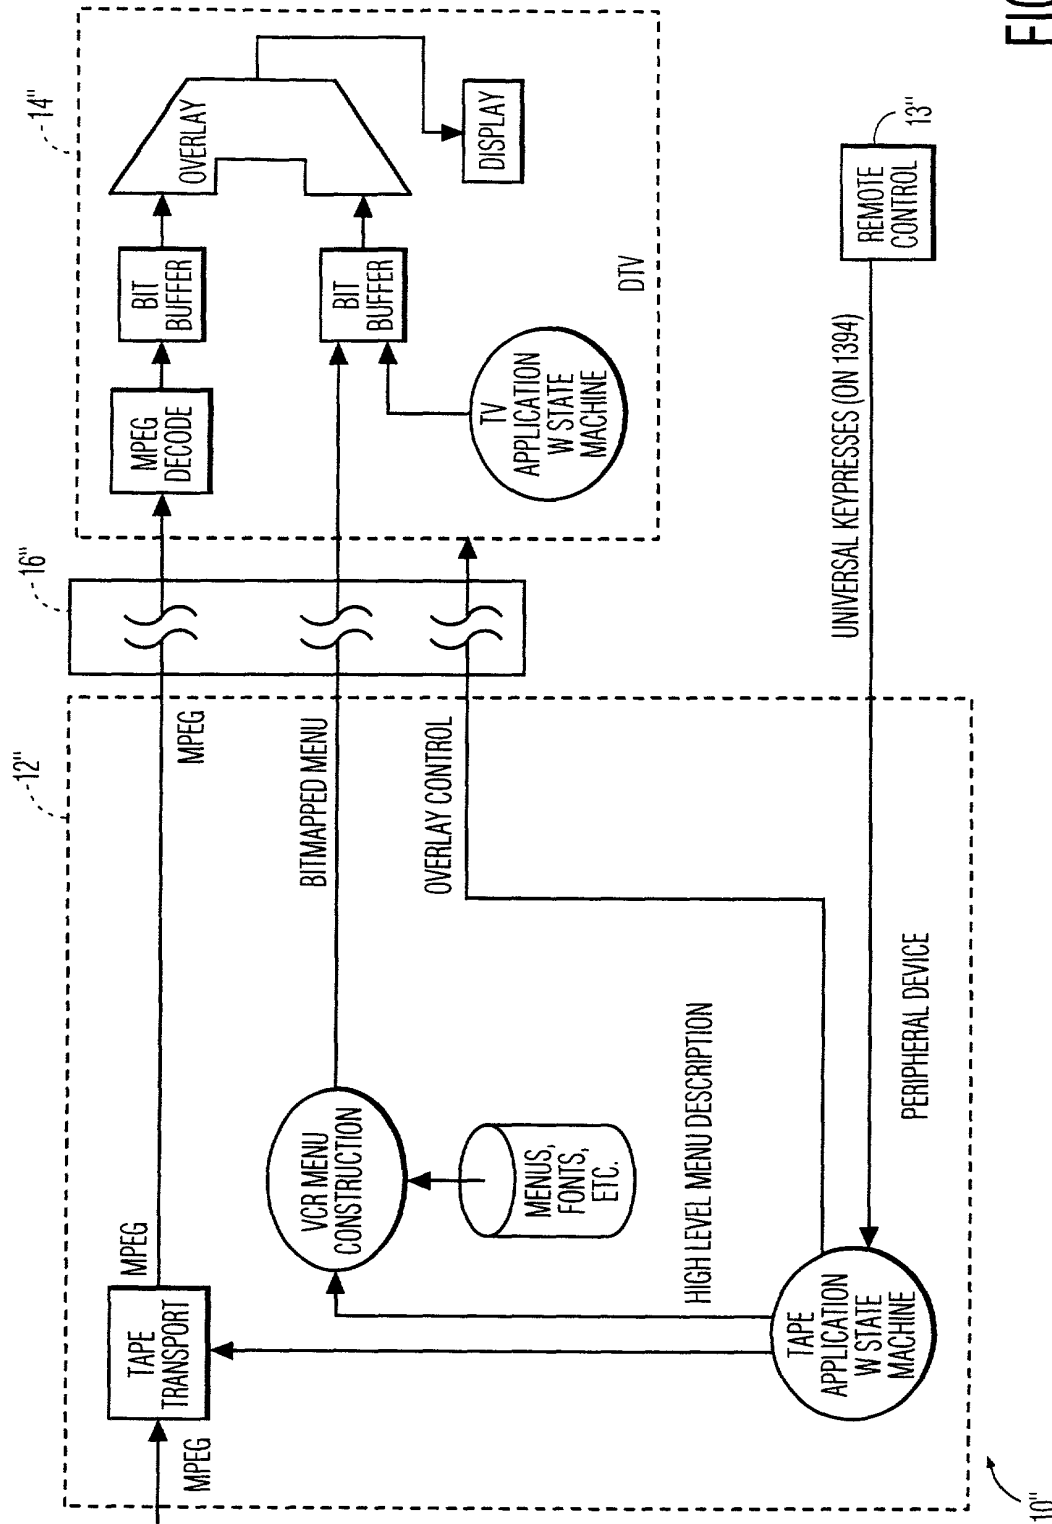

5/5

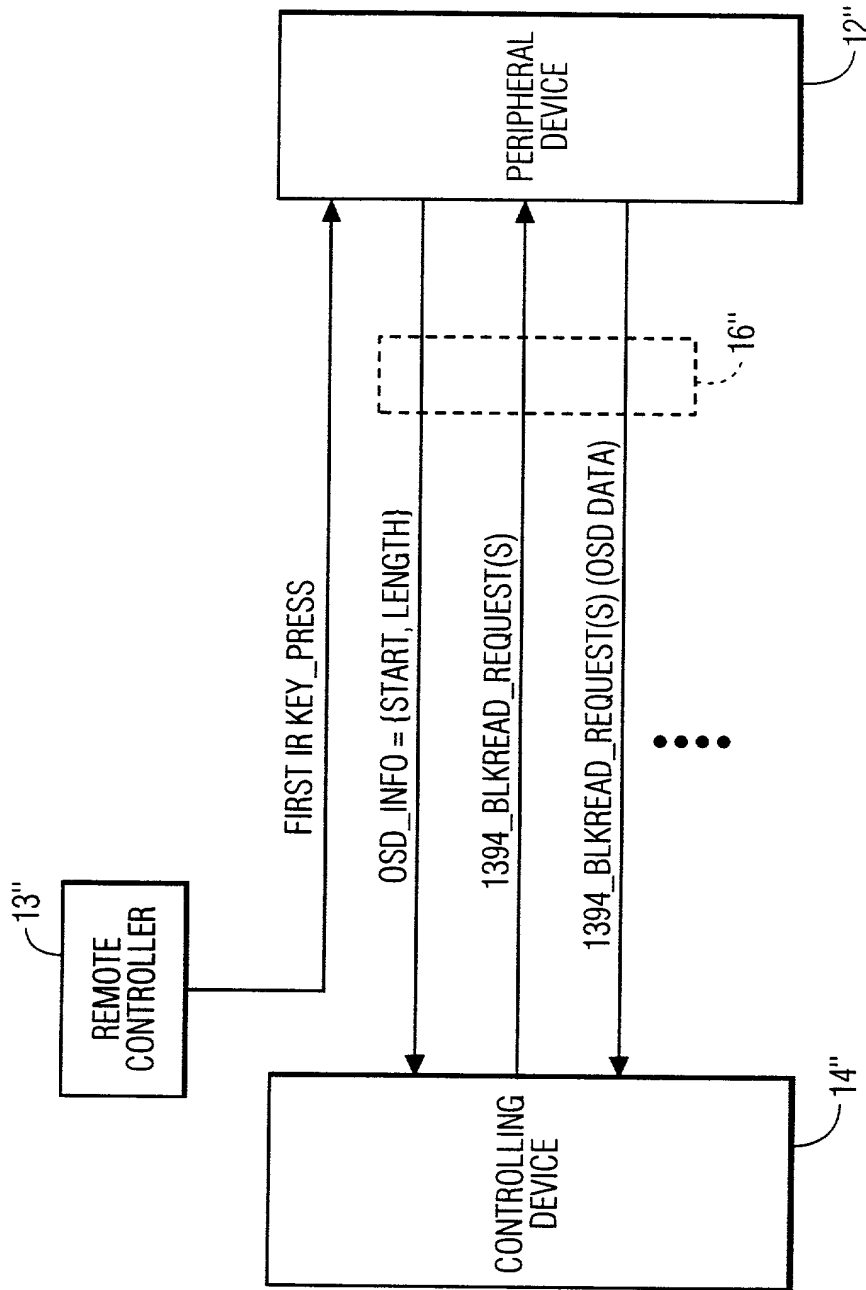


FIG. 5

09/508869



**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY**

(Includes Reference to PCT International Applications)

ATTORNEY'S DOCKET NUMBER

RCA 88761

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PERIPHERAL ELECTRONIC DEVICE AND SYSTEM FOR CONTROLLING THIS

DEVICE VIA A DIGITAL BUS

the specification of which (check only one item below):

☐ is attached hereto.

☐ was filed as United States application

Serial No. \_\_\_\_\_

on \_\_\_\_\_,

and was amended

on \_\_\_\_\_ (if applicable).

☒ was filed as PCT international application

Number PCT/US98/19483

on 18 September 1998,

and was amended under PCT Article 19 and 34

on 26 February 1999 and 15 September 1999, (if applicable).  
respectively

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

**PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:**

COUNTRY (if PCT, indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO



# Combined Declaration For Patent Application and Power of Attorney (Continued)

(Includes Reference to PCT International Applications)

ATTORNEY'S DOCKET NUMBER

RCA 88761

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

## PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

### U.S. APPLICATIONS

STATUS (Check one)

U.S. APPLICATION NUMBER

U.S. FILING DATE

PATENTED

PENDING

ABANDONED

60/058,507

18 September 1997

60/066,782

25 November 1997

60/071,341

14 January 1998

### PCT APPLICATIONS DESIGNATING THE U.S.

PCT APPLICATION NO

PCT FILING DATE

U.S. SERIAL NUMBERS  
ASSIGNED (if any)

PCT/US98/19483

28 September 1998 (28.09.98)

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Joseph S. Tripoli

- Reg. No. 26,040

Robert D. Shedd

- Reg. No. 36,269

David T. Shoneman

- Reg. No. 39,371

### Send Correspondence to:

Mr. Joseph S. Tripoli - Patent Operations  
THOMSON multimedia Licensing Inc.  
PO Box 5312  
Princeton, New Jersey 08540 US

Direct Telephone Calls to:  
(name and telephone number)

1-609-734-9875

FULL NAME  
OF INVENTOR

FAMILY NAME

FIRST GIVEN NAME

SECOND GIVEN NAME

STAHl

THOMAS

ANTHONY

RESIDENCE &  
CITIZENSHIP

CITY

STATE OR FOREIGN COUNTRY

COUNTRY OF CITIZENSHIP

Indianapolis

Indiana IN

US

POST OFFICE  
ADDRESS

POST OFFICE ADDRESS

CITY

STATE & ZIP CODE/COUNTRY

7003 Stewart Court

Indianapolis

Indiana 46256 US

FULL NAME  
OF INVENTOR

FAMILY NAME

FIRST GIVEN NAME

SECOND GIVEN NAME

RHOADS

Steven

Charles

RESIDENCE &  
CITIZENSHIP

CITY

STATE OR FOREIGN COUNTRY

COUNTRY OF CITIZENSHIP

Carmel

Indiana IN

US

POST OFFICE  
ADDRESS

POST OFFICE ADDRESS

CITY

STATE & ZIP CODE/COUNTRY

140 Parkview Road

Carmel

Indiana 46032 US

FULL NAME  
OF INVENTOR

FAMILY NAME

FIRST GIVEN NAME

SECOND GIVEN NAME

DERRENBERGER

Mike

Arthur

RESIDENCE &  
CITIZENSHIP

CITY

STATE OR FOREIGN COUNTRY

COUNTRY OF CITIZENSHIP

Fishers

Indiana IN

US

POST OFFICE  
ADDRESS

POST OFFICE ADDRESS

CITY

STATE & ZIP CODE/COUNTRY

11721 River Ridge Drive Fishers

Indiana 46038 US

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 201

SIGNATURE OF INVENTOR 202

SIGNATURE OF INVENTOR 203

Thomas Anthony Stahl

Steven Charles Rhoads

Mike Arthur Derrenberger

DATE

DATE

DATE

August 25, 2000

8/25/00

2000

8/25/00

2000



COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY  
(Continued)

540 204	FULL NAME OF INVENTOR	FAMILY NAME <u>IZZAT</u>	FIRST GIVEN NAME <u>Izzat</u>	SECOND GIVEN NAME <u>Hekmat</u>
	RESIDENCE & CITIZENSHIP	CITY <u>Carmel</u>	STATE OR FOREIGN COUNTRY <u>Indiana IN</u>	COUNTRY OF CITIZENSHIP <u>Iraq</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>2249-6 East 151 Street</u>	CITY <u>Carmel</u>	STATE & ZIP CODE/COUNTRY <u>Indiana 46033 US</u>
540 205	FULL NAME OF INVENTOR	FAMILY NAME <u>KURUGAY</u>	FIRST GIVEN NAME <u>Saban</u>	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY <u>Waukesha</u>	STATE OR FOREIGN COUNTRY <u>Wisconsin WI</u>	COUNTRY OF CITIZENSHIP <u>TR</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>302 West North Street Apt. 20</u>	CITY <u>Waukesha</u>	STATE & ZIP CODE/COUNTRY <u>Wisconsin 53188 US</u>
540 206	FULL NAME OF INVENTOR	FAMILY NAME <u>CHATTERJEE</u>	FIRST GIVEN NAME <u>Amit</u>	SECOND GIVEN NAME <u>Kumar</u>
	RESIDENCE & CITIZENSHIP	CITY <u>North Andover</u>	STATE OR FOREIGN COUNTRY <u>Massachusetts MA</u>	COUNTRY OF CITIZENSHIP <u>IN</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>84 Rosemont Drive</u>	CITY <u>North Andover</u>	STATE & ZIP CODE/COUNTRY <u>Massachusetts 01845 US</u>
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.</p>				
SIGNATURE OF INVENTOR 204 <u>Izzat Hekmat Izzat</u>		SIGNATURE OF INVENTOR 205 <u>Saban Kurugay</u>		SIGNATURE OF INVENTOR 206 <u>Amit Kumar Chatterjee</u>
DATE <u>August, 28 / 2000</u>		DATE <u>2000</u>		DATE <u>2000</u>



COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY  
(Continued)

204	FULL NAME OF INVENTOR	FAMILY NAME IZZAT	FIRST GIVEN NAME Izzat	SECOND GIVEN NAME Hekmat
	RESIDENCE & CITIZENSHIP	CITY Carmel	STATE OR FOREIGN COUNTRY Indiana	COUNTRY OF CITIZENSHIP Iraq
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 2249-6 East 151 Street	CITY Carmel	STATE & ZIP CODE/COUNTRY Indiana 46033 US
205	FULL NAME OF INVENTOR	FAMILY NAME KURUGAY	FIRST GIVEN NAME Saban	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY Waukesha	STATE OR FOREIGN COUNTRY Wisconsin	COUNTRY OF CITIZENSHIP TR
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 302 West North Street Apt. 20	CITY Waukesha	STATE & ZIP CODE/COUNTRY Wisconsin 53188 US
206	FULL NAME OF INVENTOR	FAMILY NAME CHATTERJEE	FIRST GIVEN NAME Amit	SECOND GIVEN NAME Kumar
	RESIDENCE & CITIZENSHIP	CITY North Andover	STATE OR FOREIGN COUNTRY Massachusetts	COUNTRY OF CITIZENSHIP IN
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 84 Rosemont Drive	CITY North Andover	STATE & ZIP CODE/COUNTRY Massachusetts 01845 US
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.</p>				
SIGNATURE OF INVENTOR 204		SIGNATURE OF INVENTOR 205		SIGNATURE OF INVENTOR 206
Izzat Hekmat Izzat		Saban Kurugay <i>SK</i>		Amit Kumar Chatterjee
DATE 2000		DATE 8/29/2000		DATE 2000



COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY  
(Continued)

204	FULL NAME OF INVENTOR	FAMILY NAME IZZAT	FIRST GIVEN NAME Izzat	SECOND GIVEN NAME Hekmat
	RESIDENCE & CITIZENSHIP	CITY Carmel	STATE OR FOREIGN COUNTRY Indiana	COUNTRY OF CITIZENSHIP Iraq
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 2249-6 East 151 Street	CITY Carmel	STATE & ZIP CODE/COUNTRY Indiana 46033 US
205	FULL NAME OF INVENTOR	FAMILY NAME KURUGAY	FIRST GIVEN NAME Saban	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY Waukesha	STATE OR FOREIGN COUNTRY Wisconsin	COUNTRY OF CITIZENSHIP TR
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 302 West North Street Apt.20	CITY Waukesha	STATE & ZIP CODE/COUNTRY Wisconsin 53188 US
206	FULL NAME OF INVENTOR	FAMILY NAME CHATTERJEE	FIRST GIVEN NAME Amit	SECOND GIVEN NAME Kumar
	RESIDENCE & CITIZENSHIP	CITY North Andover	STATE OR FOREIGN COUNTRY Massachusetts	COUNTRY OF CITIZENSHIP IN
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 84 Rosemont Drive	CITY North Andover	STATE & ZIP CODE/COUNTRY Massachusetts 01845 US
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.</p>				
SIGNATURE OF INVENTOR 204 Izzat Hekmat Izzat		SIGNATURE OF INVENTOR 205 Saban Kurugay		SIGNATURE OF INVENTOR 206 Amit Kumar Chatterjee
DATE 2000		DATE 2000		DATE 2000



COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY  
(Continued)


207	FULL NAME OF INVENTOR	FAMILY NAME <u>Sanjeev</u> <u>NAGIPAL NAGPAL</u>	FIRST GIVEN NAME <u>SANJEEV</u>	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY <u>Boulder Longmont</u>	STATE OR FOREIGN COUNTRY <u>Colorado CO</u>	COUNTRY OF CITIZENSHIP <u>IN</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>2727 Nelson Road, Apt. 305</u> <u>4930 Meredith Way, Apt. 305</u>		STATE & ZIP CODE/COUNTRY <u>80503</u> <u>Colorado 80303</u> <u>US</u>
208	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
209	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 207 <u>Sanjeev Nagpal</u> <u>Sanjeev Nagpal Nagpal</u>	SIGNATURE OF INVENTOR 208	SIGNATURE OF INVENTOR 209
DATE <u>August 30</u> , 2000	DATE	DATE



United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

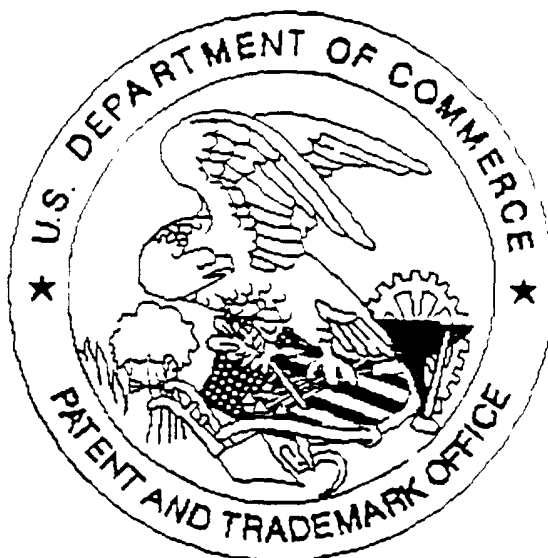

SCANNED, # 16

Application deficiencies were found during scanning:

☒ Page(s) \_\_\_\_\_ of Abstract were not present:  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present:  
for scanning. (Document title)

☐ Scanned copy is best available.